


CALCINED NEUBURG SILICEOUS EARTH (SILFIT Z 91) AS ANTI-BLOCKING AGENT PET FILM

Standard PET grade with IV 0.61, biaxial stretched (ratio 3.5 x 3.5), end film thickness 15 µm


Coefficient of Friction COF [-]
Film / Metal, static

DIN EN ISO 8295, 100 mm/min

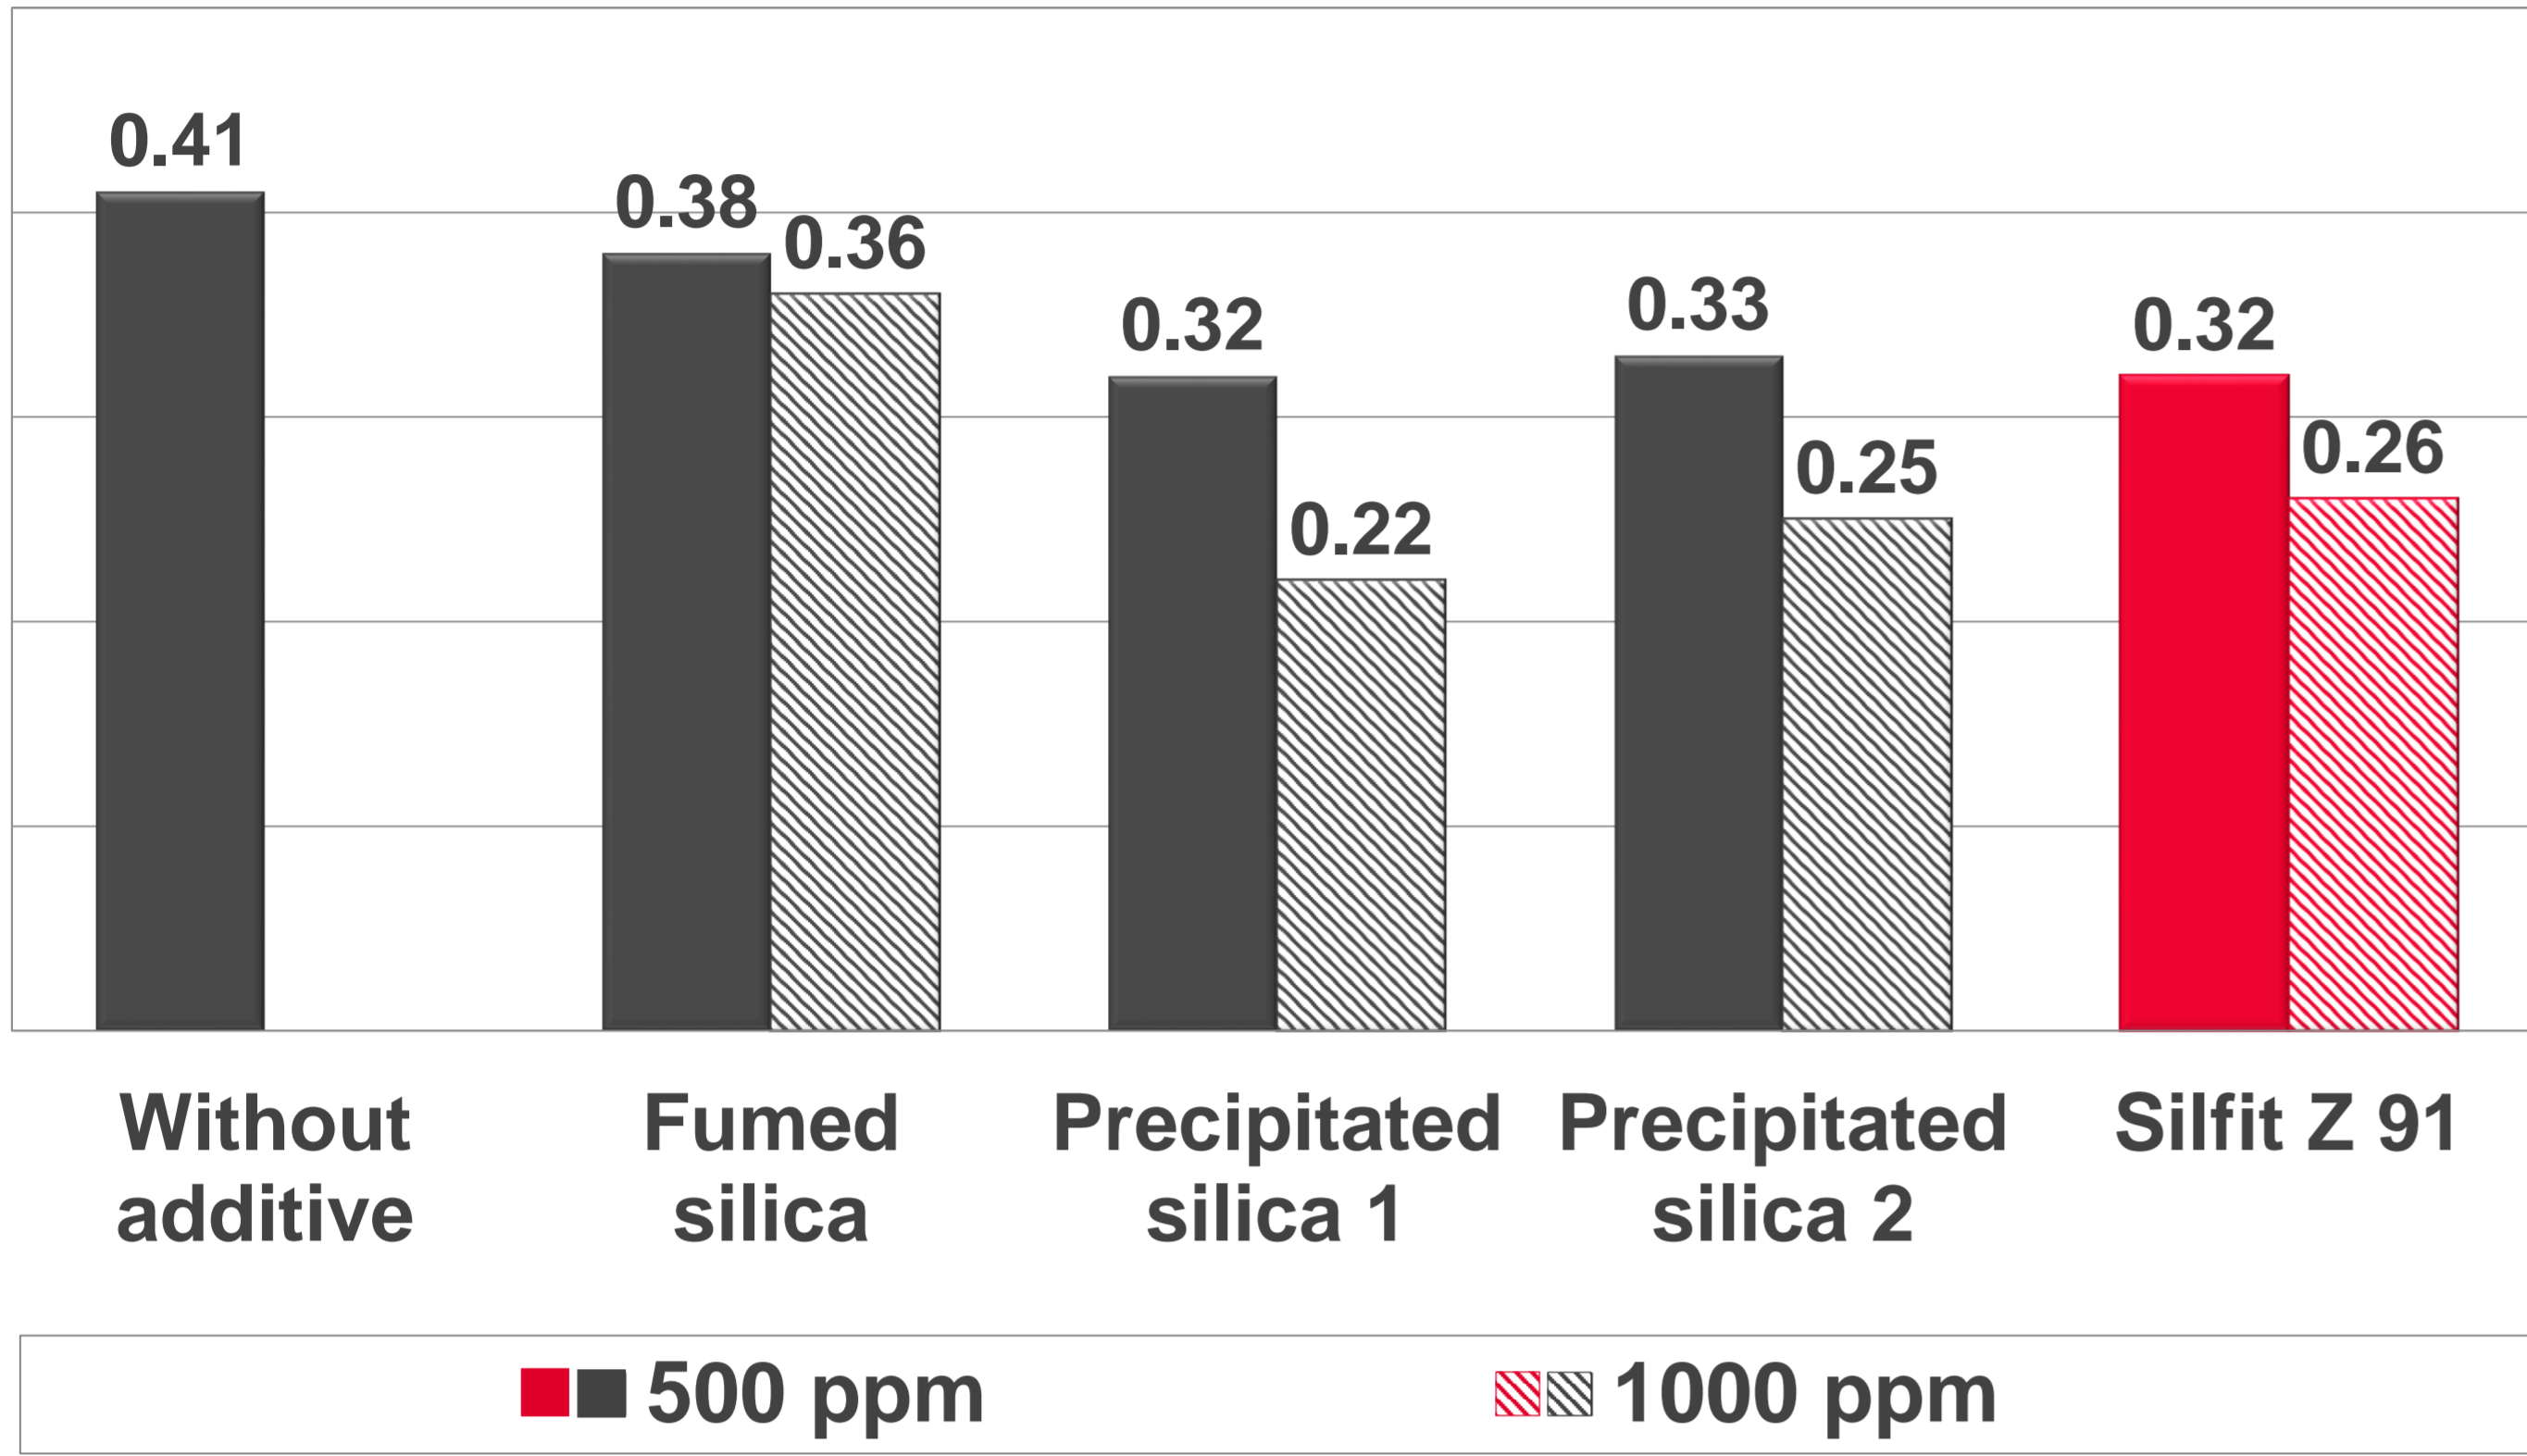


Coefficient of Friction COF [-]
Film / Film, static

DIN EN ISO 8295, 100 mm/min

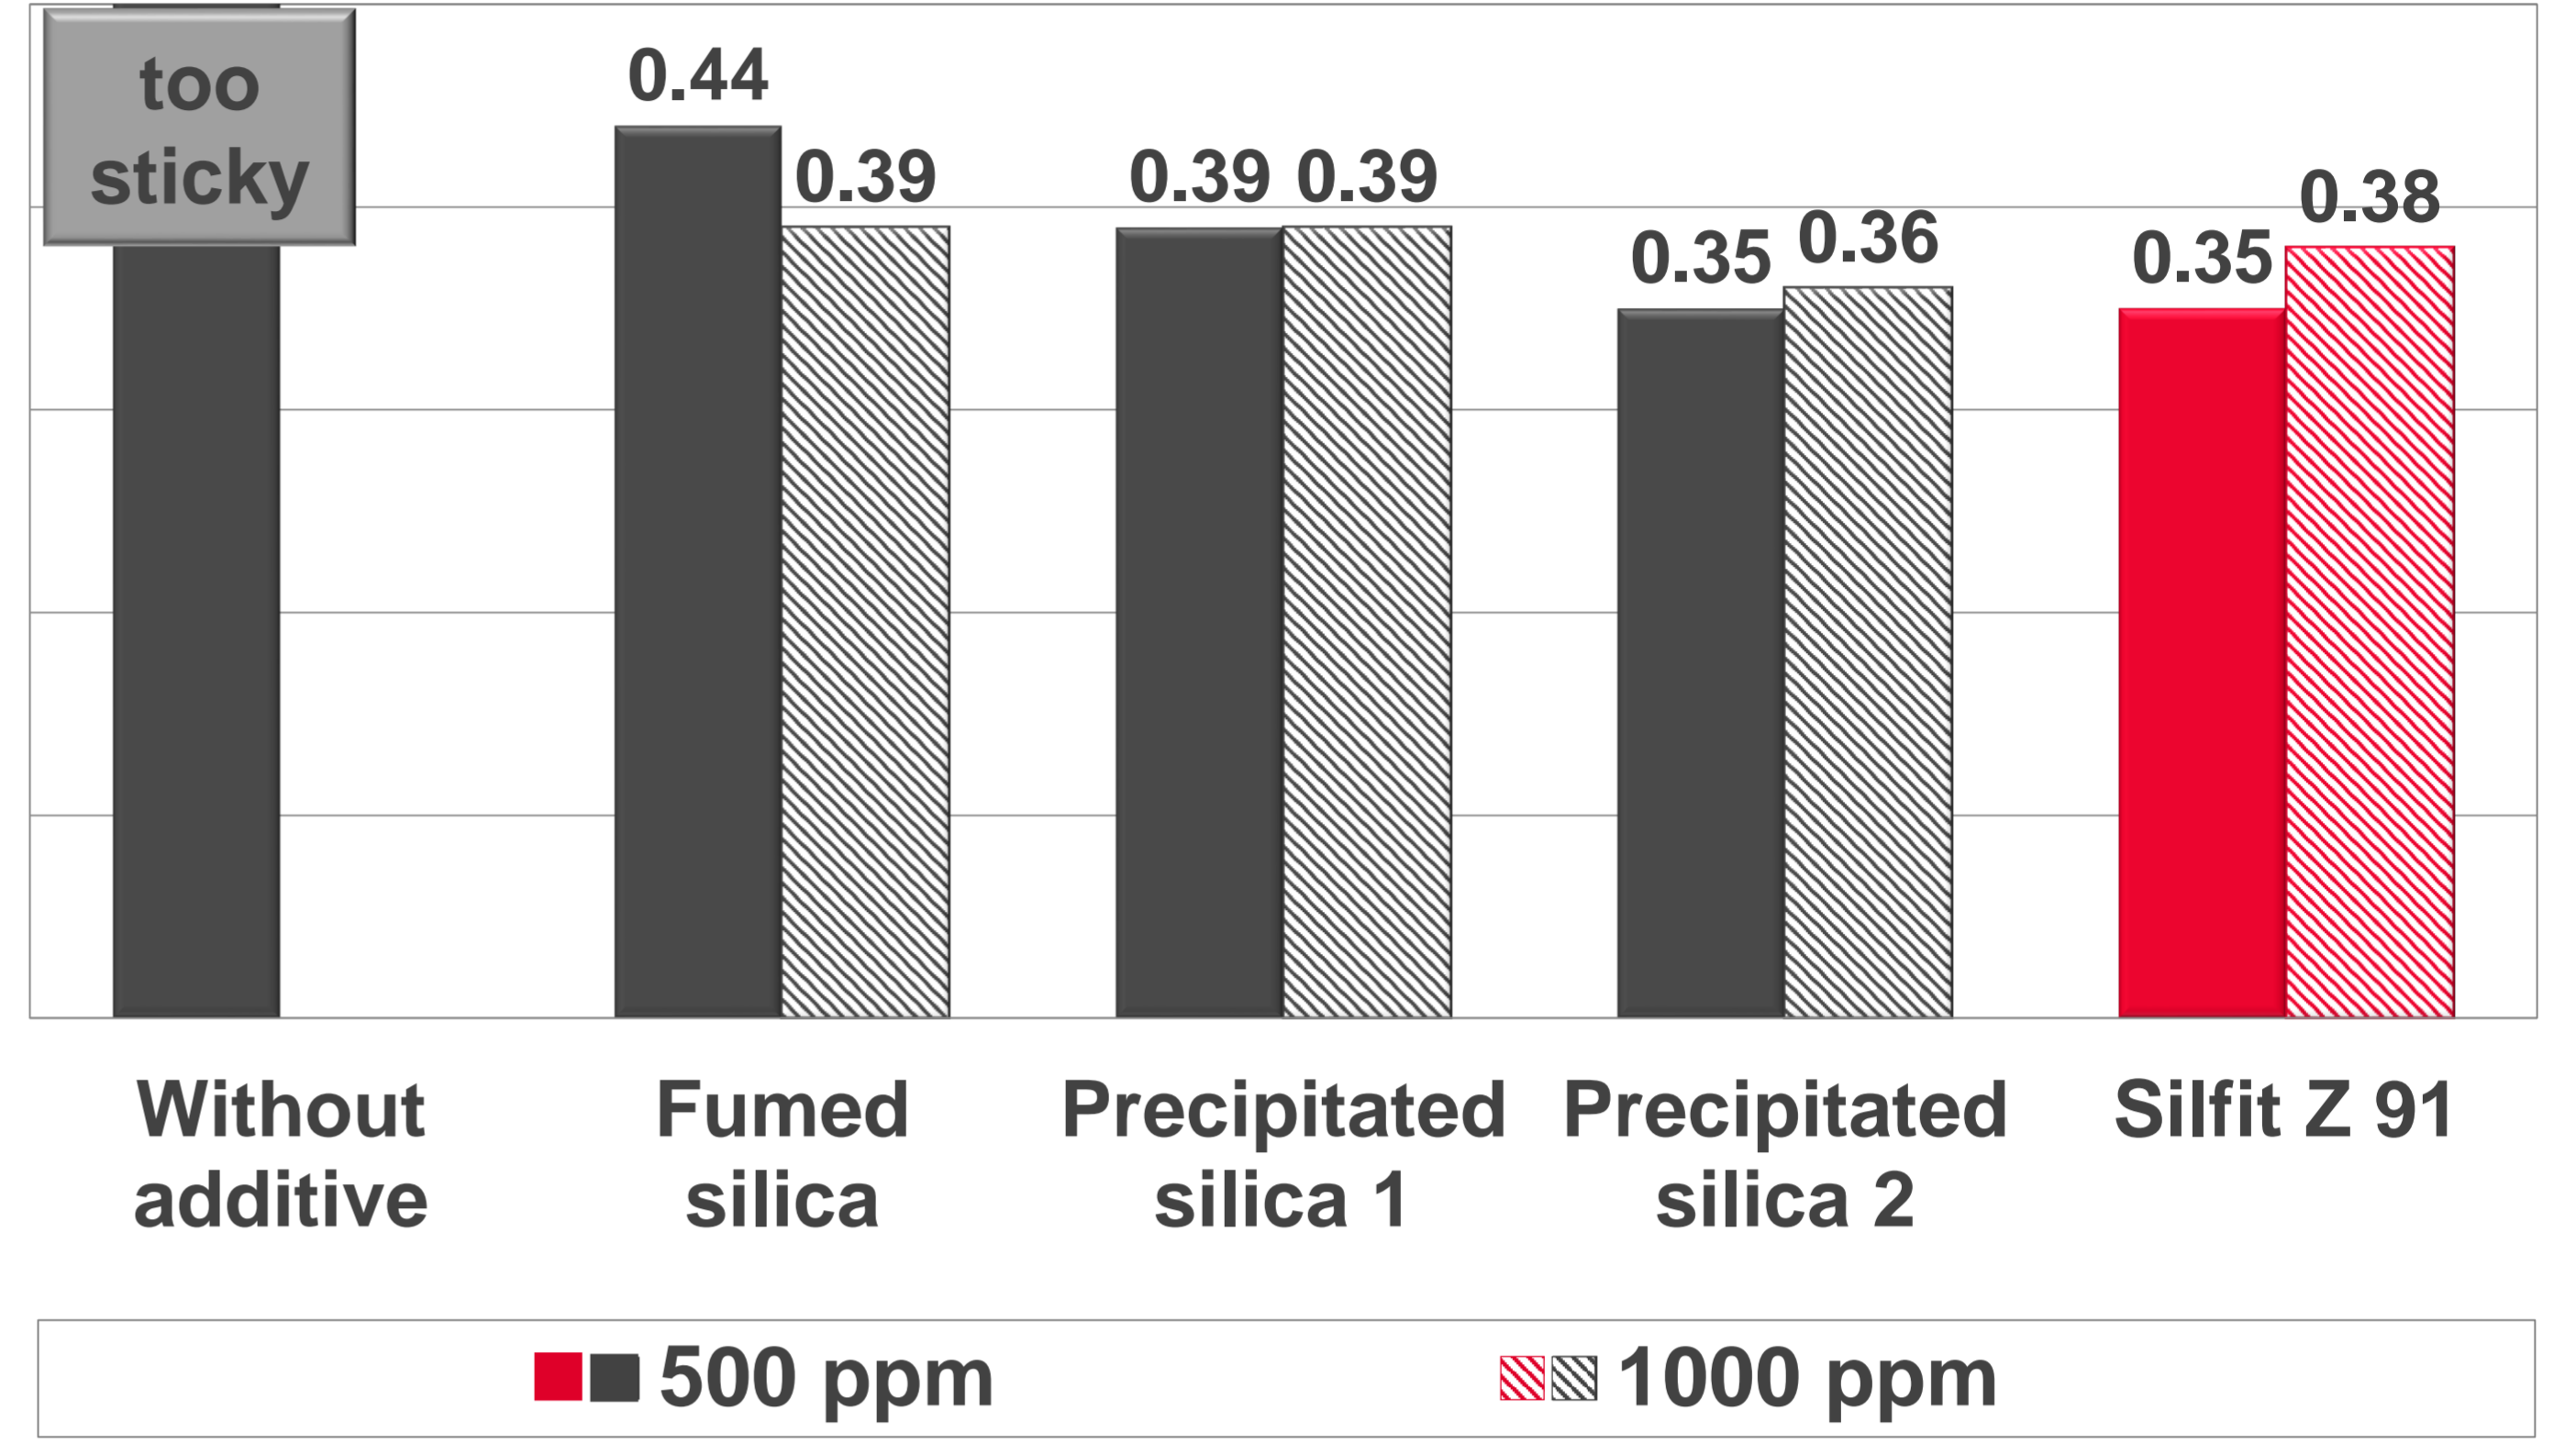


Gloss 45° [gloss units]

ASTM 2457

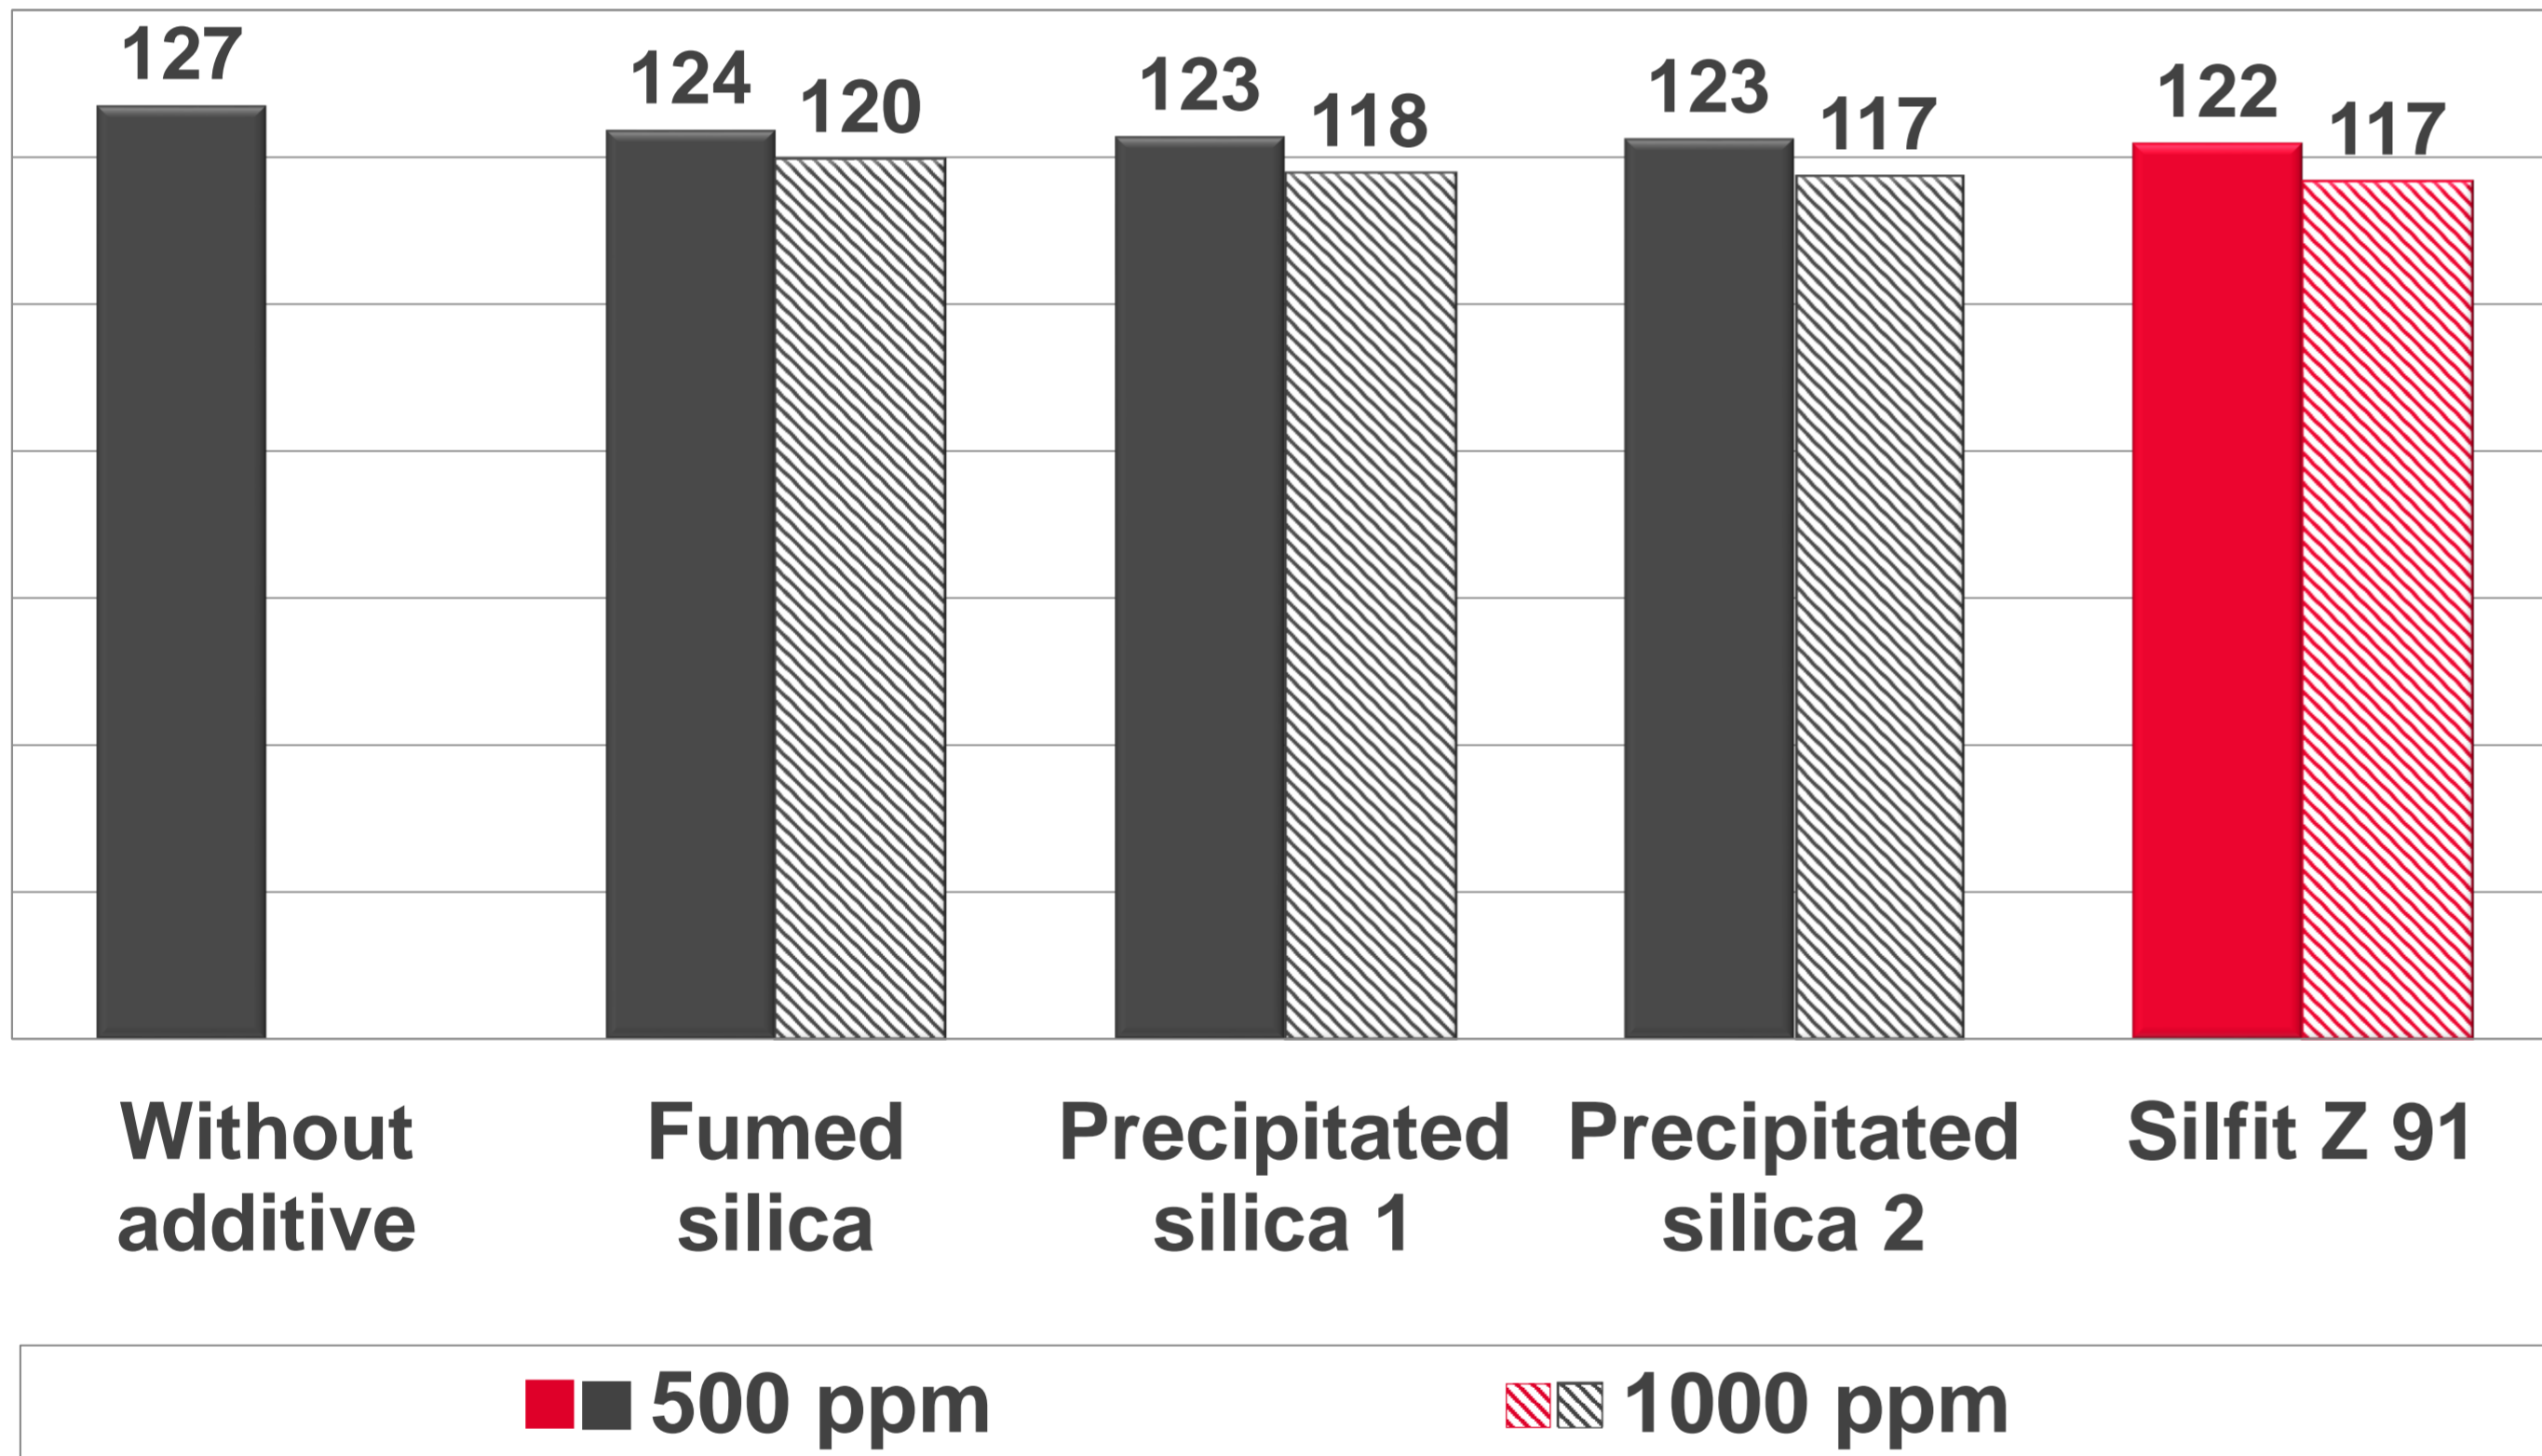


Transmittance [%]

ASTM 1003

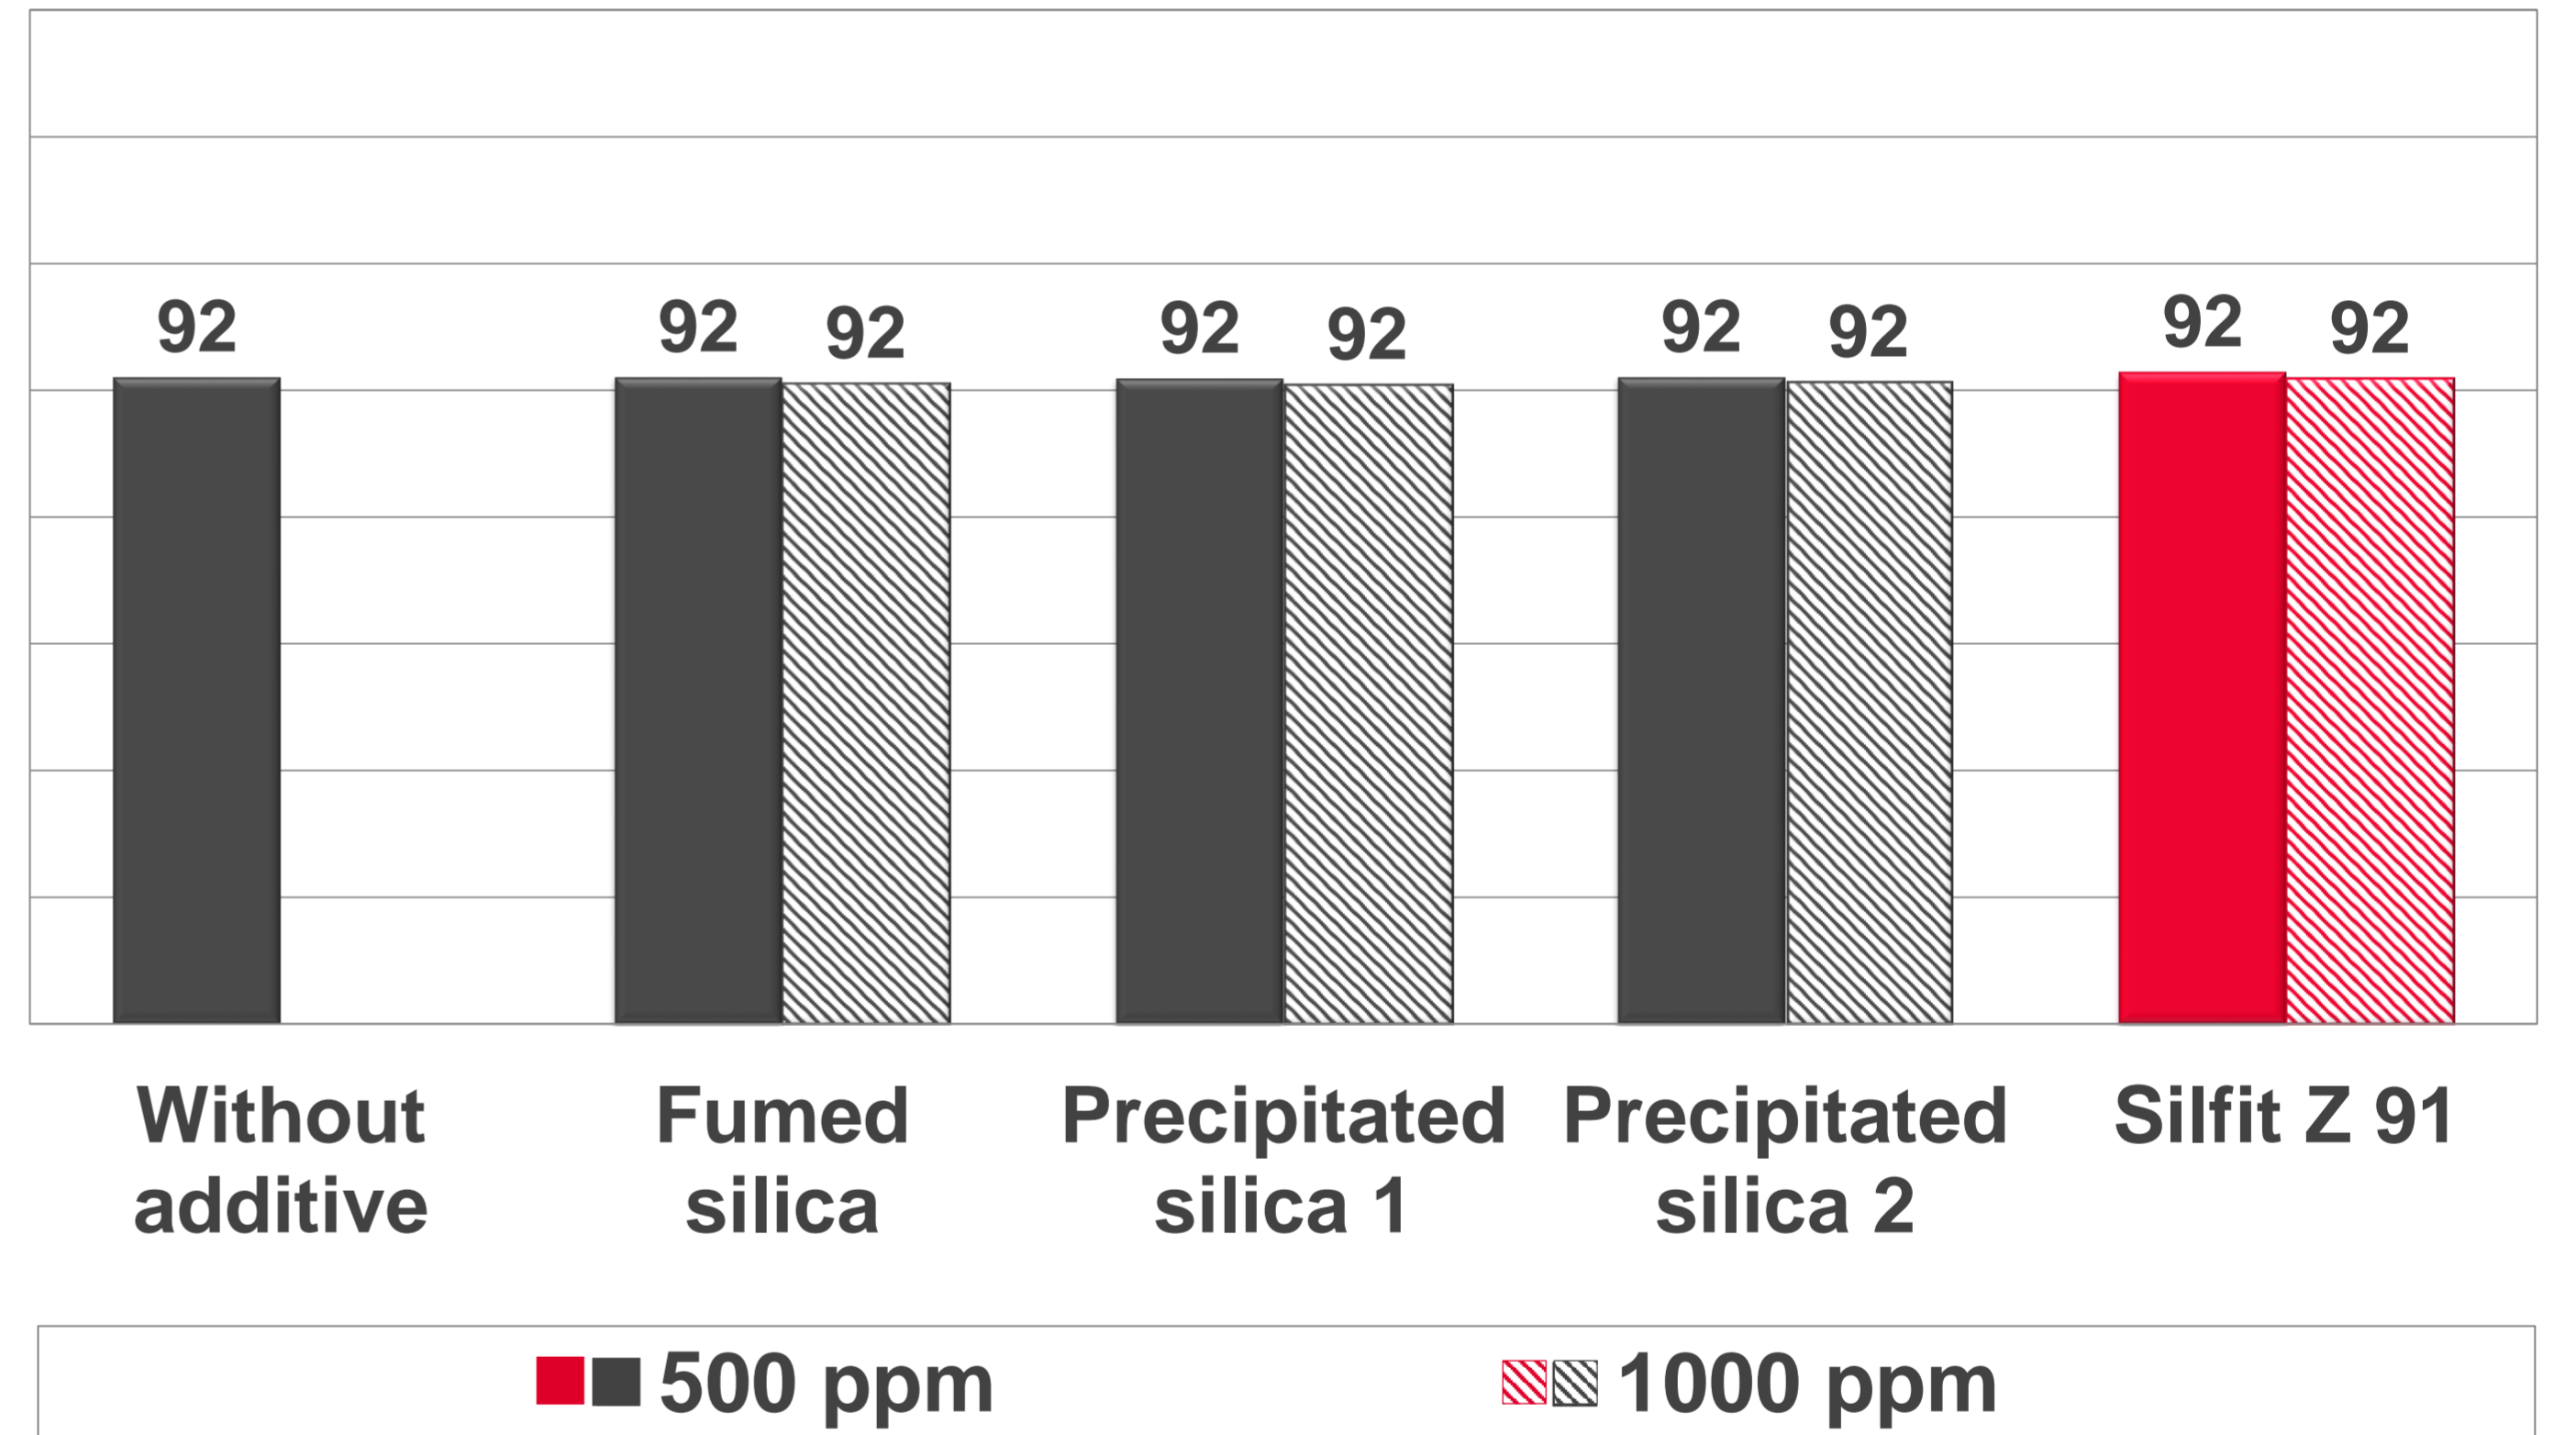

Clarity [%]

ASTM 1003

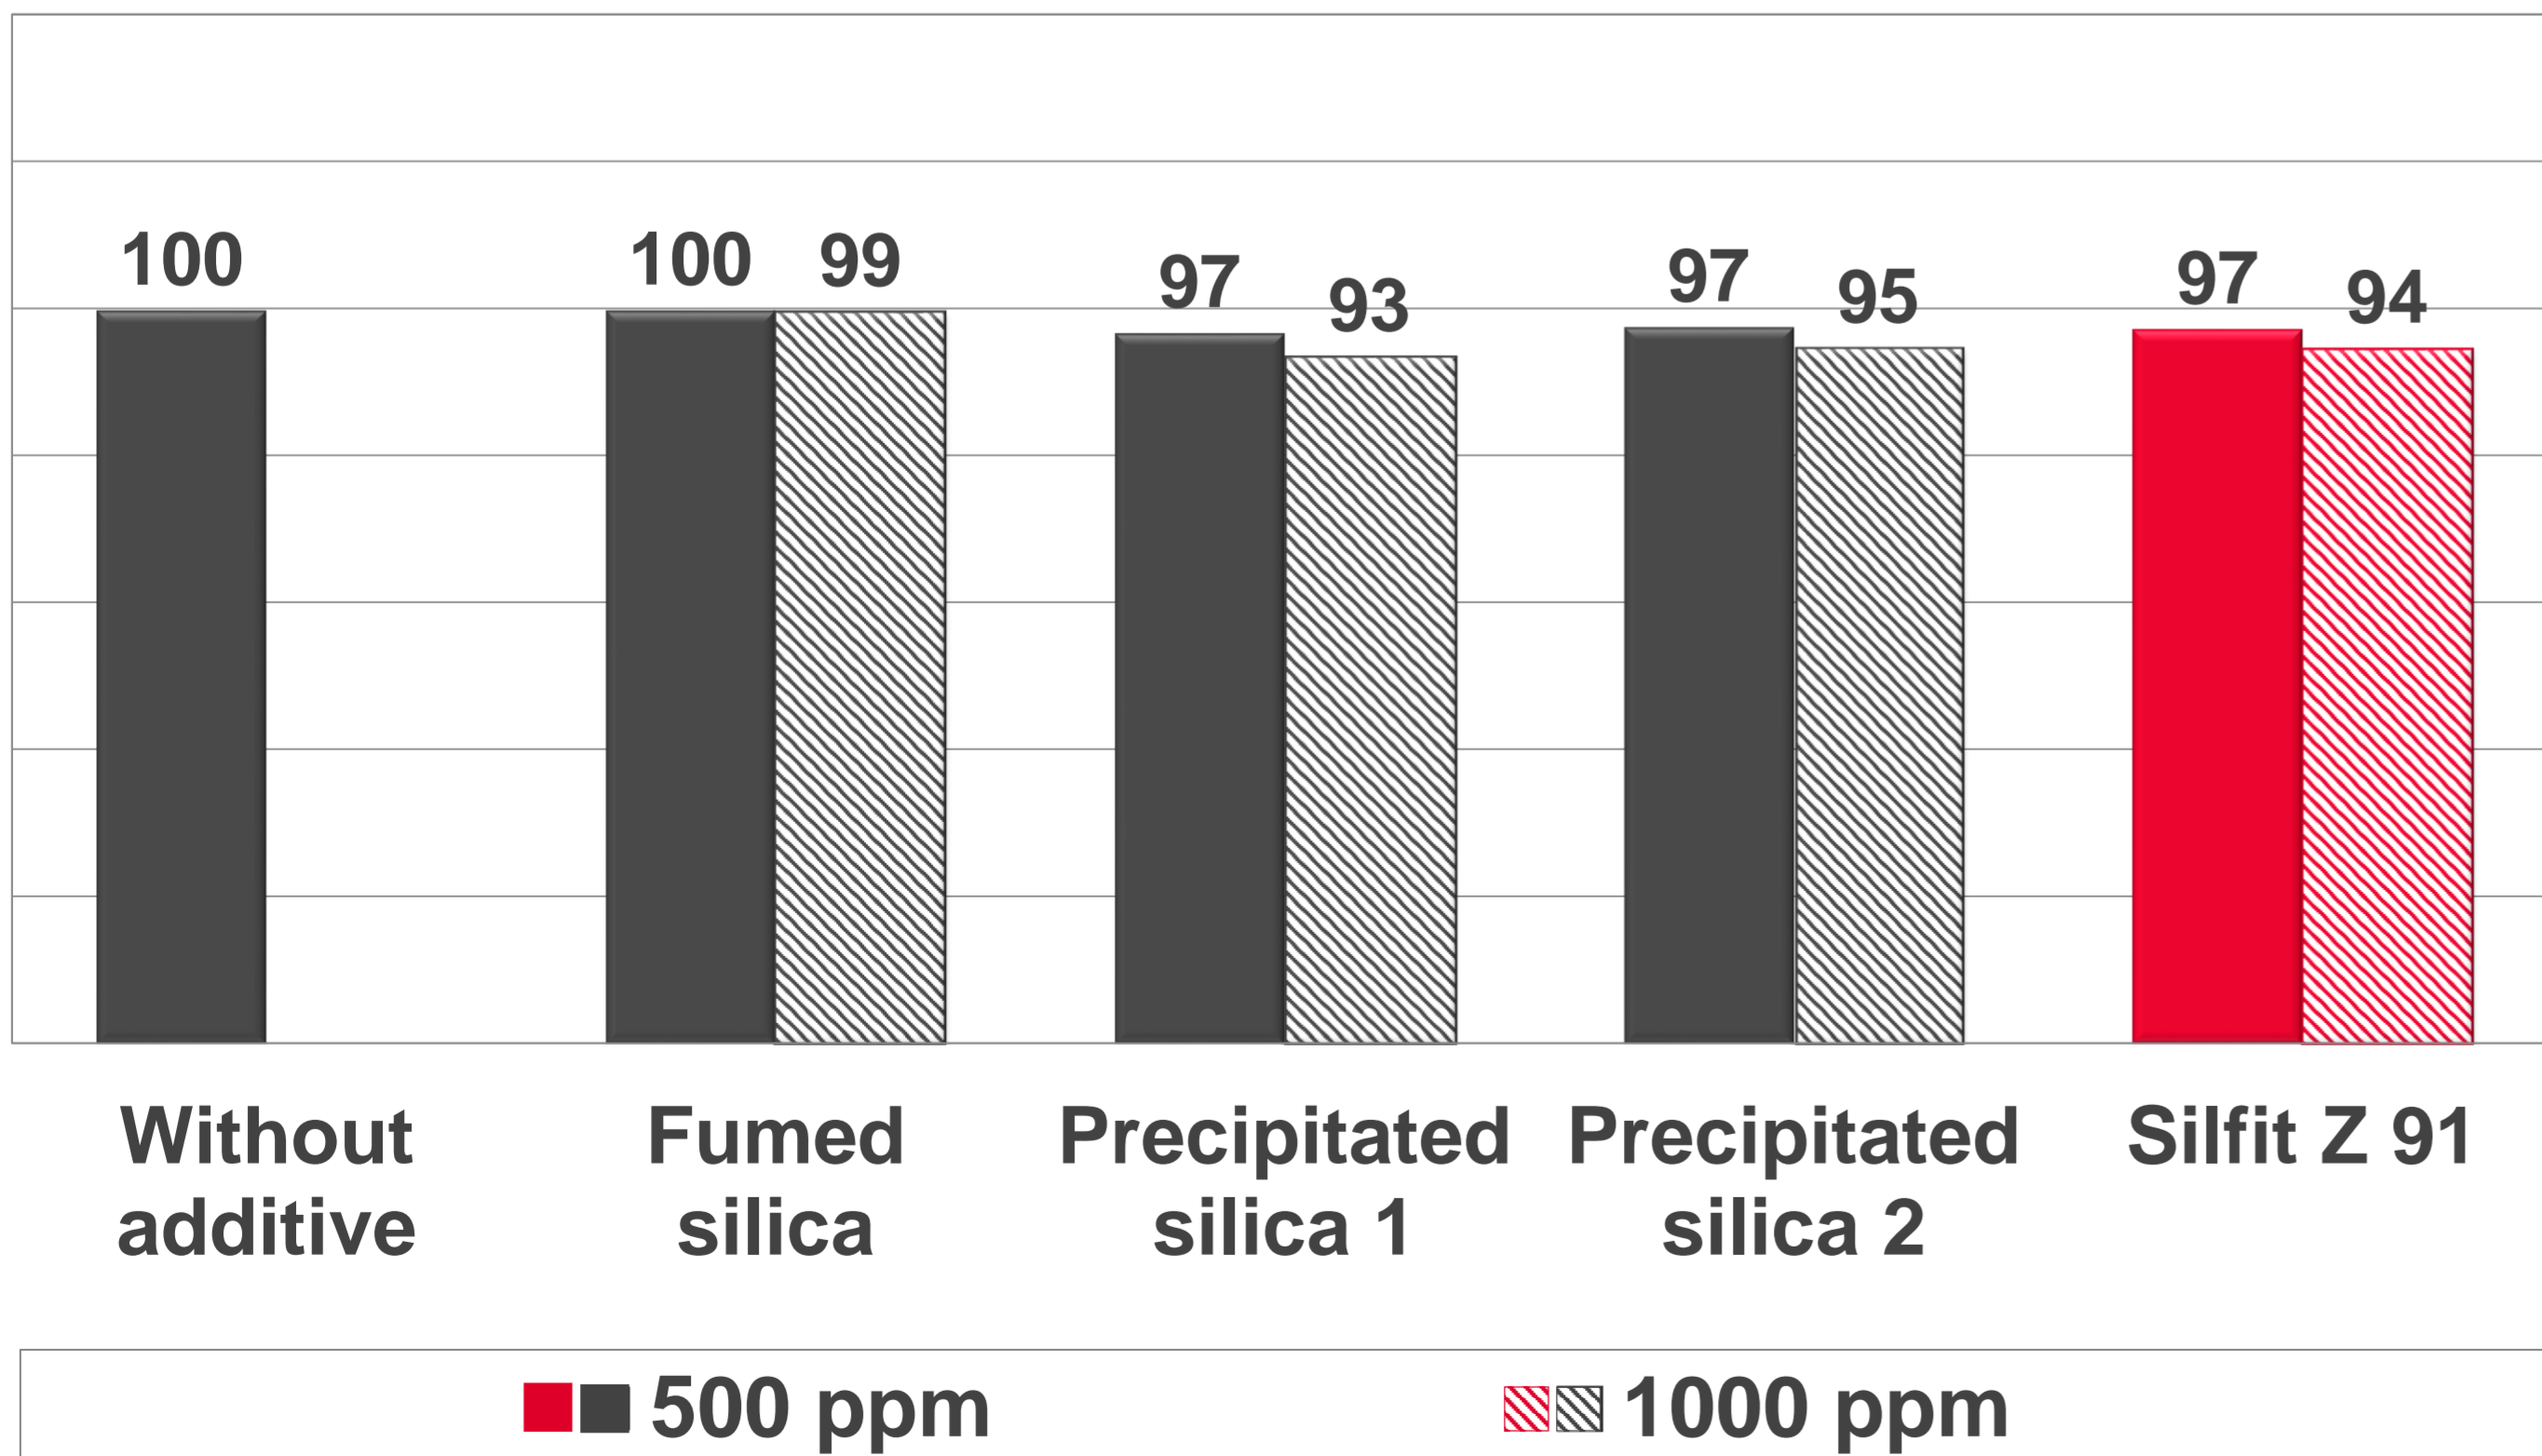

Haze [%]

ASTM 1003

